




LANGUAGE: ENGLISH

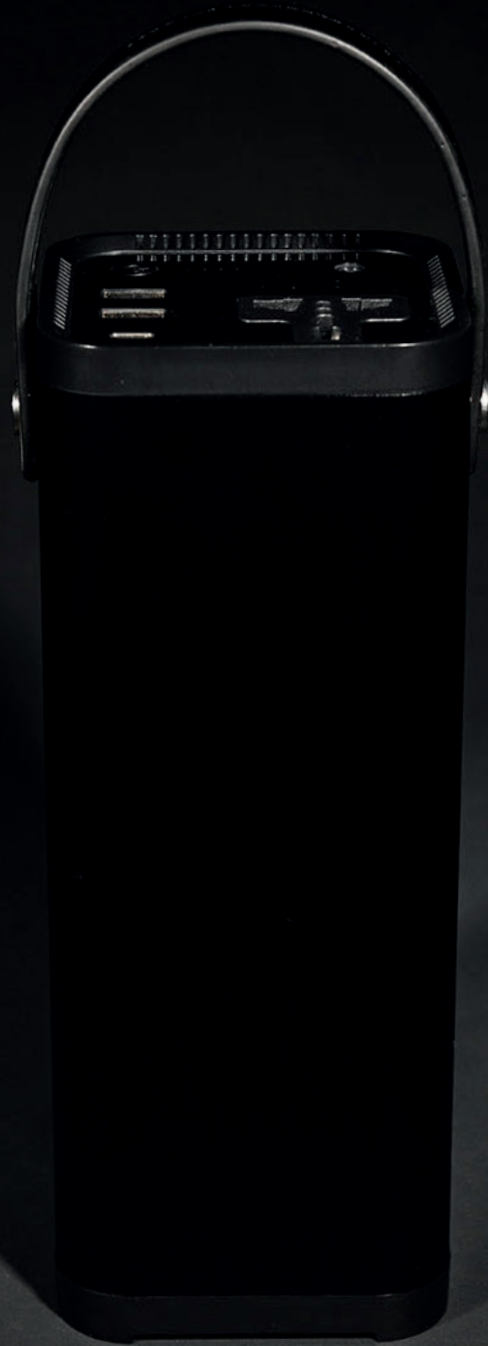

 **POWERTECH**  
**PS200**  
POWER STATION

**INSTRUCTION MANUAL**

# PS200 PORTABLE POWER STATION

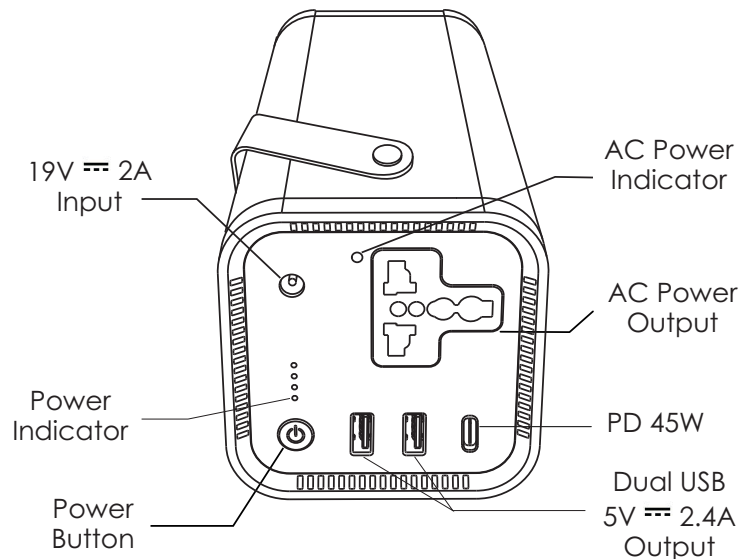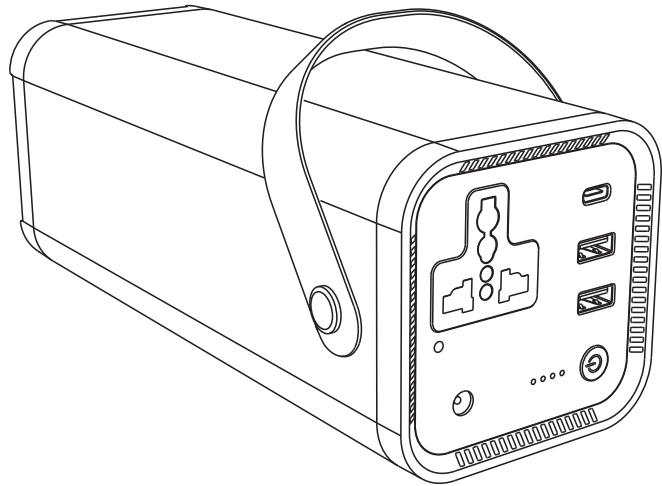

## CHARGING YOUR PS200 PORTABLE POWER STATION

Before using or storing, plug your PS200 Portable Power Station by 19V/2A adapter into the wall until it is fully charged. If at any point when 1st LED blinking from your PS200 Portable Power Station, plug it into a power source, like an AC outlet or a solar panel, as soon as possible. This built-in warning indicator is to help prevent battery damage when the charge gets low.


**Power LED Indicators:** The power LED indicator indicates the charge level of your PS200 Portable Power Station. There are 4 segments to the battery, approximating 25% - 50% - 75% -100% capacity. As you use your PS200 Portable Power Station, indicating the remaining charge.

When charging your PS200 Portable Power Station you will notice a battery segment blinking at a 1 second interval. This indicates the current charge status. Once your PS200 Portable Power Station is fully charged, all battery segments will be lit and remain solid.

### Charging from Solar Panel

The PS200 Portable Power Station charging port is located on the top-left corner of the faceplate. This DC port is designed to work with our solar panels and is capable of taking in 19V output of solar.


1. Place your solar panel where it will get as much direct sunlight as possible.
2. Connect with solar panel to DC INPUT port on the front of the PS200 Portable Power Station. You will know the PS200 Portable Power Station is charging when the blue LED light next to the INPUT port lights up, and the battery LED indicator is blinking. The PS200 Portable Power Station is fully charged when all battery segments stop blinking and remain solid.

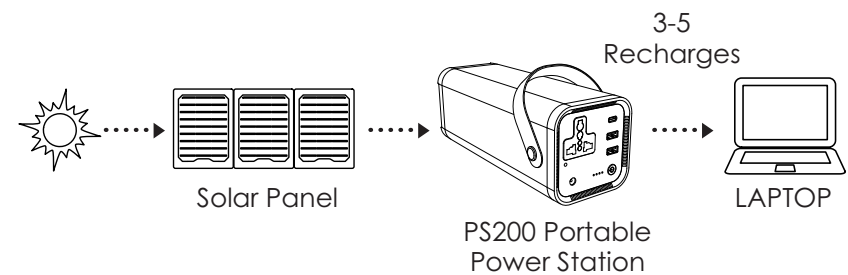

## Charging from the Wall

Using the included AC 19V/2A adapter, plug your PS200 Portable Power Station into any wall outlet by 19V/2A adapter. You will know the PS200 Portable Power Station is charging when the blue LED light next to the INPUT port turns on, and battery LED indicator are blinking.

The PS200 Portable Power Station is fully charged when all battery segments stop blinking and remain solid. The PS200 Portable Power Station should recharge from the wall in about 5 hours.

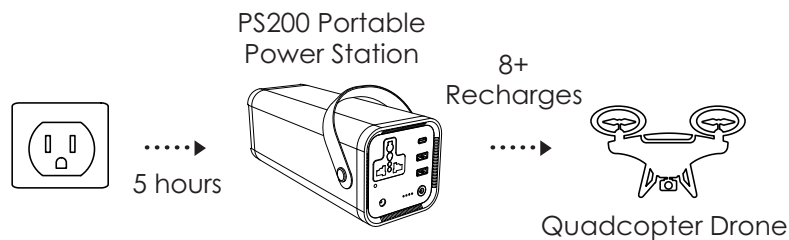

## USING YOUR PS200 PORTABLE POWER STATION

### 1. What can be powered by your PS200 Portable Power Station:

**USB:** Smartphones, MP3 Players, Digital Cameras, E-readers, Tablets, etc.

**AC:** Laptops, Quadcopter drone, CPAP, Fan, Mini refrigerator, Display Monitors, Appliances, TVs, etc.

### 2. How to use your PS200 Portable Power Station:

Press the power button located above each port you will be using.

You'll know the port is turned on when the green LED light on the button is illuminated.

**\*\*When the AC port is not in use, turn it off to conserve power (double click the button).**

Plug in your gear for power anywhere life takes you. If possible, keep your PS200 Portable Power Station plugged into a power source when not in use.

### 3. Best-Use Strategy:

When recharging gear with your PS200 Portable Power Station, take note of the LED indicator. If you plug in devices that have a high-power requirement, the charge level of your PS200 Portable Power Station will drop quickly, and you may not get the entire capacity to use.

On the flipside, if you're recharging devices that draw power more slowly (a tablet), you will get closer to entire capacity from your PS200 Portable Power Station.

If you're experiencing shorter runtimes, you may want to check the device's power requirements, see TROUBLESHOOTING for help.

### 4. Cold Weather Usage:

Cold temperatures (below freezing) can impact the PS200 Portable Power Station's battery capacity. If you'll be living off-grid in sub-zero conditions, we recommend keeping your PS200 Portable Power Station in an insulated cooler and connected to a power source (solar panels).

The natural heat generated by the PS200 Portable Power Station contained in an insulated cooler will keep battery capacity at its highest.

### 5. Pure-Sine Wave Inverter:

Your PS200 Portable Power Station has a built-in pure-sine wave inverter, which means it provides the cleanest power for your devices.

### 6. Storage and Downtime Maintenance:

Having your PS200 Portable Power Station connected to a power source, like a solar panel or wall outlet, between adventures or while in storage keeps its battery healthy and topped off.

This prolongs battery life and will ensure your PS200 Portable Power Station is charged and ready to go all day, every day.

If you can not keep your PS200 Portable Power Station plugged into a power source during storage, fully-charge your PS200 Portable Power Station every 3 months and store it in a cool, dry place.

Failure to maintain your PS200 Portable Power Station by following these steps can result in battery damage which will void the product warranty.





















## SPECIFICATIONS

Capacity:	154Wh (3.7V/41600mAh) 172Wh (3.7V/46400mAh)
Battery Type:	Lithium-ion cell
AC Output Power:	DC 19V/2A by Adapter or Solar Panel
AC Output:	100-120V~/60Hz (for Portable Power Station1 version) 220-240V~/50Hz (for Portable Power Station2 version)
Output:	USB-1:5V/2.4A Max. USB-2:5V/2.4A Max. USB-3:PD 45W
Inverter Waveform:	Pure Sine Wave
Net Weight:	1.8Kg / 63oz appr.
Dimensions:	232.5 x 90 x 90mm / 9.1 x 3.5 x 3.5in
Warranty:	12 months
Protection:	Low Voltage Protection Over Voltage Protection Over Power Protection Over current Protection Over Temperature Protection Short Circuit Protection

## LED INDICATOR





















There are four LED indicators to display the battery level status of the PS200 Portable Power Station. When being recharged, the LED indicators will light up based on the current battery level:

Charging: :LED flashes; : LED is off; : LED is on

Battery Status Indicator	Battery Level
   	0% - 25%
   	26% - 50%
   	51% - 75%
   	76% - 99%
   	100%

When devices are connected, the LED indicators will light up as follows:

: LED is on; : LED is off : LED flashes

Battery Status Indicator	Battery Level
   	100% - 75%
   	75% - 50%
   	50% - 25%
   	25% - 10%
   	≤10%

- Low Battery: When the battery is lower than 10%, the 1st LED will be blinking. Output for the USB port and AC output will automatically stop working until battery is empty.
- AC Power LED indicator: When it is green, AC output is on, when it is red, AC output is faulty, need to reboot.

## POWER BUTTON

1. When the AC output is off, double click the Power Button to turn on AC output. Press the button again to show the remaining battery level before charging another device.
2. When the connected device is fully charged, the AC output will automatically shut off. Turn it on again before charging another device.
3. If the AC output fails, double click the Power Button to turn on the AC output again.

## FREQUENTLY ASKED QUESTIONS

### What does a pure-sine wave inverter mean?

When it comes to power, you might have heard the letters DC and AC thrown around. DC stands for Direct Current and is the only type of power that can be stored in a battery. AC stands for Alternating Current, which is the type of power your devices use when they're plugged into the wall.

An inverter is required to change DC output to AC output and requires a small amount of power for the change. You can see this by turning on the AC port.

A pure-sine wave inverter, like the one found in your PS200 Portable Power Station, produces an output that is exactly the same as supplied by an AC wall plug in your house. Although integrating a pure-sine wave inverter takes more components, it produces power output that makes it compatible with almost all AC electric devices you use in your house.

So in the end, the pure-sine wave inverter allows your PS200 Portable Power Station to safely power almost everything under watts in your house that you would normally plug into the wall.

### How do I know if my device will work with the PS200 Portable Power Station?

First, you'll need to determine the amount of power your device requires. This may require some research on your end, a good online search or examining the user guide for your device should suffice.

To be compatible with the PS200 Portable Power Station, you should use devices that require less than 200W. Second, you will need to check the capacity for the individual output ports.

For example, the AC port is monitored by an inverter that allows for 200W of continuous power. This means if your device is pulling more than 200W for an extended period of time, the PS200 Portable Power Station's inverter will get very hot and dangerous and will shut off.

Once you know your device is compatible, you will want to determine how long you will be able to power your gear from the PS200 Portable Power Station.

### How to charge my iPhone?

Connect iPhone with PS200 Portable Power Station USB output socket by cable. (If PS200 Portable Power Station does not automatic run, just short press power button to switch on the PS200 Portable Power Station).

### How to supply power for my TV/Laptop/Drone?

Connect your TV to AC output Socket, then double click the button to switch on the PS200 Portable Power Station, when the AC power LED is green colour, it starts to supply power for your TV.

## TROUBLESHOOTING

If your devices are not recharging from your PS200 Portable Power Station, follow these steps:

1. Ensure the AC Output Port has been turned on. The green LED light should be lit up.
2. Check the Battery Power LED Indicator. If it is at 25% or below, recharge your PS200 Portable Power Station (if you charge from AC).
3. Verify your device is suitable for use with the PS200 Portable Power Station:
  - a. All of the PS200 Portable Power Station output ports have their own max power capacity. Check the PS200 Portable Power Station's Tech Specs to ensure your device is compatible.
  - b. Some devices with rechargeable batteries, like laptops and tablets, may pull more watts when in use. In these cases, power down your device and recharge it.

If you are still experiencing trouble with your PS200 Portable Power Station, please contact our Wolf Customer Solutions Centre by email.

## WARRANTY

If you need information to the warranty please visit  
[www.wolfint.co.uk/product-warranty/](http://www.wolfint.co.uk/product-warranty/)

Please ensure to register your new Wolf product at  
[www.wolfint.co.uk/product-registration/](http://www.wolfint.co.uk/product-registration/)

## CAUTION

- Keep away from heat sources and liquids.
- Please do not dismantle this product.
- Fully charge the PS200 Portable Power Station at least once every 3 months.

When the PS200 Portable Power Station is very hot, stop to use until it is cool to normal temperature. It may happen when you load devices over its rated output power.

When inside temperature is over 60°C, the unit will automatic shutdown to protect and keep safety. After the temperature is lower than 45°C, the power generator will be back and ready for use.

## WOLF INTERNATIONAL

Suite 1, 284 Warley Hill, Great Warley, Brentwood, Essex CM13 3AB

E: [sales@wolfint.co.uk](mailto:sales@wolfint.co.uk)

T: +44 (0) 333 366 8888

E: [support@wolfint.co.uk](mailto:support@wolfint.co.uk)

[www.wolfint.co.uk](http://www.wolfint.co.uk)

Information of troubleshooting is available at [www.wolfint.co.uk](http://www.wolfint.co.uk)


## Customer Support

If you need support you can contact us by:

Telephone: +44 (0) 333 366 8888

Email: [support@wolfint.co.uk](mailto:support@wolfint.co.uk)

More information can be found at [www.wolfint.co.uk/customer-support/](http://www.wolfint.co.uk/customer-support/)

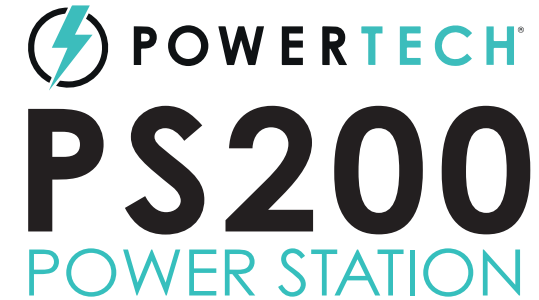

For language Translations of PS200 POWERSTATION visit  
[www.wolfint.co.uk](http://www.wolfint.co.uk)



Languages available:  
English / Italian / French / Dutch / German



5 060877 251634

Product Code WFPT019

[www.wolfint.co.uk](http://www.wolfint.co.uk)